

Anti-Lost Alarm FC-407

User Manual



SHENZHEN FRIENDCOM TECHNOLOGY DEVELOPMENT CO. , LTD

**Address: 2/E, Multifunction Building, Dongpeng Industrial Park, Wuhao Road, North
Section of Hi-tech Park, Shenzhen 518057 China**

Tel: +86-755-86026603 +86-755-29926100

Fax: +86-755-86026300

E-mail: faq@friendcom.com

Website: <http://www.friendcom.cn>

Introduction :



- Use FC-407 Anti-lost Alarm on your children, to avoid lost , you can be alerted at any time when your loved Child disappears out of your sight, and a beep be guided to him/her immediately. Or you can use find-button to locate him .
- Use it on handicapped person ,elder, you can give more care for them. you may enjoy the safety and easement feeling.
- Use also on pet,luggage,purse..... because you needn't to worry about all the above to be lost ,stolen, or even robbery, as it can sound alarm even when it leaves away from you.

Features:

- * **Inovative Idea. Humanized Compact Design**
- * **Comply With FCC&CE**
- * **Water Resistant Bear**
- * **Alarm & Locating Function**
- * **Low power detection**
- * **Easy & Convenient to Operation**
- * **Sleek, Compact,Easy to Carry**

Specifications:

- Frequency : 433.92MHz
- Hand-held Transceiver :
 - a) RF power : 10dBm
 - b) Dimesions (H x W x D): 15 x 67 x 45mm
 - c) Battery: CR 2032 x 2
 - d) Weight :31g (included in battery)
- Bear Transceiver :
 - a) RF power : 10dBm
 - b) Dimensions (H x W x D): 35 x 65 x 54mm
 - c) Battery: CR 1632 x 2
 - d) Weight: 34g (included in battery)
- Color : Blue / Red / Brown / Gray / Black /
- Operating Temperature: -20°C ~ 60°C
- Effective Searching Distance: more than 60 meters in an open-air environment

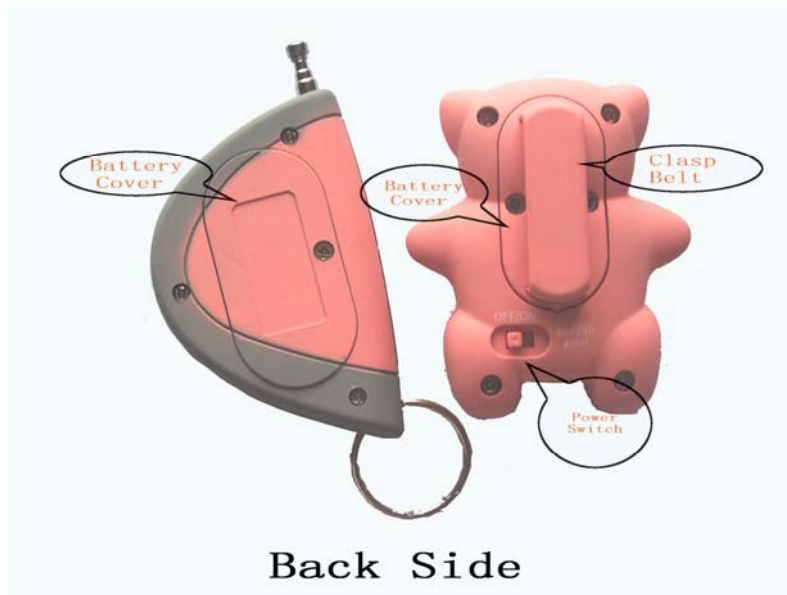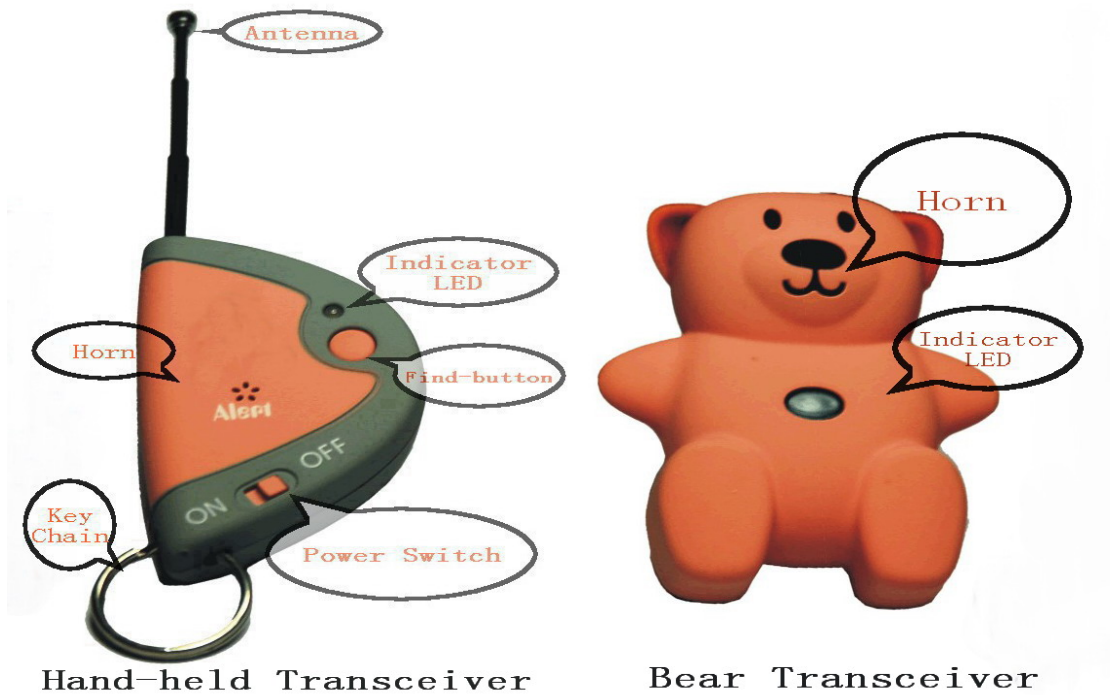

OPERATIONAL DESCRIPTION:

- FC-407 Anti-lost Alarm is made up of Two elements : Bear Transceiver and Hand-held Transceiver
- Step of Starting two Unit: Turn on the handset unit, the green light will flash 3 times then go into sleep state. Turn on the Bear unit. The green LED will flash 3 times too then the red light will flash every 3 seconds. This indicates the bear is in waiting state. Press the find-button of handset, the red light will be on for 3 seconds to send ID code signal to the bear, the bear will return an acknowledge signal to the handset, the green light of the handset will flash one times and sound three beeps after receiving the

acknowledge. This indicates that the handset has successfully connected with the bear.

- Alarm Function : After the successful connection of the bear and the handset, the red light of the bear and the green light of the handset will flash one times every 3 seconds. To locate your child, press the find-button, the red light of the handset will be on for 50 ms, the bear will continuously sound one long and three short beeps for 3 seconds to help you locate the position of your child within the effective distance (about 180 feet). Range may vary from place to place depending on the environment.
- Searching Function : If the bear is about 8m far from the handset, the handset will sound 4 urgent beeps for 3 times. When the bear is more than 25m far from the handset, the green light of the handset will be on for 3 seconds as well as beeping, at this time, if you press the find-button of the handset, the red light of the handset will be on for 3 seconds.
- Low power detection : After turning on the handset, if the green light flashes every 18 seconds and sounds a beep, it is indicating the battery power is poor. At this point the batteries of the handset should be replaced. After turning on the bear, if the red light flashes every 18 seconds and sounds a beep, it is indicating the battery power is poor. At this point the batteries of the bear should be replaced.

BATTERY REPLACEMENT :

- Use a screwdriver to loosen the screws on the back of the Handset & Bear then remove the battery cover.
- Follow the marked battery polarities to install CR 1632 Lithium batteries for the bear and 2 CR2032 for the handset.
- Replace battery covers for each component.

Note:

- * Always turn the bear to the off position when not in use.
- * Signal strength can be affected by radio interference and geographic location.
- * Changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment. Changes or modifications to the device may void FCC and CE compliance. Infrequently used radio links should be tested regularly to protect against undetected interference or fault.

Warranty :

The Anti-lost Alarm FC-407 is delivered with 1 year warranty.

All counterfeit product can't use this warranty.