

WMB14-433LR Hybrid Module(Wireless M-Bus + LoRaWAN)

○ FEATURES

- UART TTL interface
- 2.2V - 3.6V power supply
- Ultra low Power consumption <2μA@25°C
- 25.5 x 14.2 x 3.75mm

○ SUPPORTED FREQUENCY BAND


- 433.5 MHz-434.475 MHz, EU433

○ SECURITY

- AES128 data encryption

○ STANDARDS

- Conforms to EU R & TTE directive (EN 300 220, EN 301 489, EN60950)
- Complies with EN 13757 - 4 & OMS

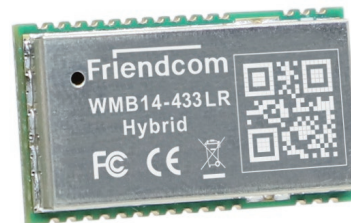

WMB14-433LR